

Ring scanner RS 10 Barcode reader

Bluetooth
Rotating reading head
2D Barcode reader
8 hour rechargeable and replaceable battery
A perfect solution for logistics warehouse and shops
Left hand and right hand friendly





CERE 2





Model

RS102 RING SCANNER

Scan

Linear barcode reader 2D

Alimentation

- Power source: DC 5 ± 0.15V
- Amperage scan: 75mA (stable) / 85mA (peak)
- Standby amperage: <8µA

Environment

- Operating temperature: -15 ° C to
 50 ° C
- Storage temperature: -20 ° C to 60° C
- Humidity: 5% -95% (non-condensed)
- Drop 1.5 m
- IP54

Communication

Bluetooth connection up to 20m

Autonomy

8 hours of autonomy including
 a scan / 10 seconds

Characteristics


- Dimensions: 51 (W) x 38 (W) x 44 (H) mm
- Weight: 50g (with battery, without mains power)
- Buttons: Play button, On / Off button
- Battery: 3.7V, 360mAh: rechargeable battery-ion
- Indicators: Buzzer, LED (3 colors)
- Connection: Micro USB
- Ring Strap: Nylon Strap with Velcro

Inbox Accessories

- Charger
- USB cable

Control Button

- Power ON / OFF
- Scan trigger button

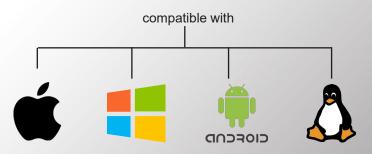







Web: www.athesi.com