

Athesi

A french brand

Specialist in business
mobility solutions



Athesi
Mobile Generation

Athesi, a product range adapted to all sectors of activity

Food manufacturing Maintenance
Smart Industry Real Estate Automotive
Government Transportation and Logistics
Emergency services Electric services Energy
Army Manufacturing Police Civil engineering
Engineering Warehouse Management Financial
Defence Public safety Construction Pharmaceutical
Catering Field Operations Oil & Gas Telecoms
Distribution Healthcare Logistics Public Sector
Retail Services Utilities Hospitality Security

Athesi, international distribution



Production Certifications





About Athesi

Founded in 2005, Athesi is a French manufacturer located in Paris area. With a strong experience in Automatic Identification and Business Mobility market since 1990, Athesi offers a wide product range for professionals: barcode scanners, rugged smartphones, rugged tablets, RFID solutions....

As a specialist in professional hardware solutions, Athesi does everything possible to ensure that its products meet business requirements as closely as possible. Athesi is committed to deliver solutions that help customers capture and manage business data.

Focused on its hardware design expertise, Athesi has set up an international network of channel partners, leaders in mobile computing and integration. Through these partnerships, Athesi enables to support global and major projects.



Always attentive to the requirements of its customers and with its experience, Athesi listens to market requests and trends to design new products.

Leader in the field of professional mobility, Athesi's main mission is to offer a full range of equipments and associated services in order to increase the efficiency and productivity of its customers. Athesi offers high-technology products to manage all types of business applications in mobility, traceability and data collection areas.

Athesi supports its customers in their digital migration helping them with customizable devices that all professional users needs.

From the beginning, Athesi has been an independent company with equity capital. The financial statements, which are published every year, have been positive from the beginning. Major part of profits is reinvested every year for Research and development.

European Services Centers are in France and Italy.



Athesi, the coherence of the product range

Athesi offers a very complete product range aligned to the needs of small, large, national and international companies. Athesi wants, whatever their line of business, to offer the best product for their technology and financial requirements.

Because needs are different and each customer is unique, Athesi designs a wide products portfolio with differences such as: ruggedness, service contracts, prices etc.

The product range is organized as following :



Athesi E Series :

- Rugged, lightweight and thin products
- Bundle configurations
- Large stock availability
- The most attractive prices
- Product lifecycle minimum 3 years
- 3 years service contracts



Athesi R Series :

- Products with an industrial design
- High-performance products
- High flexibility in configuration and options
- A very large choice of professional accessories
- Customizable hardware and software for projects
- Product lifecycle minimum 5 years
- 3 to 5 years service contracts





Support department

Athesi provides free dedicated support department to help you to make the best use of its products. The Hotline answers all questions and, as far as possible, helps to avoid a product return by providing the necessary support on line. This support is available for pre-sales and post-sales requests.



Customization department

Depending on project range, the «customization» department analyses the potential modifications and adaptations of the hardware and OS or firmwares. This department is also offering tailor-made solutions for specific factory processes (installation of masters, custom packaging, labelling, etc.) to optimize the supply chain and save time and money.

Repair department

Athesi European Services Centers for repairs are in France & Italy. Athesi is highly committed to ensure a high level of service and a well-managed lead time. Service Centers are composed by a team of engineers and specialized technicians, to be able to do any kind of repair. The after-sales staff is in permanent link with R&D, which allows a permanent qualitative evolution of the products. Athesi offers a range of standard or tailormade service contracts to satisfy all requirements depending on the sector.



Logistic department

Athesi has large quantity of products available in stock in order to ensure short delivery time. Alike, a large quantity of spare parts enables us to offer an optimal quality of service and to commit deadlines for maintenance services. As soon as device is dispatched, a realtime tracking number is issued.

Rugged Smartphones and PDA - E Series



E40 4 GB RAM, 64 GB ROM. Multi-touch touchscreen display. Micro SD. SIM. Charging connector on base. Rear camera 13 Mpx autofocus and flash. USB Type C. 162x73x19mm. Operating from -10°C to +55°C.

Shipped with : 3800 mA battery, hand strap, screen protection, USB power adapter.

Processor	OS	Display	Barcode Reader	RFID Reader	Communication	IP rating / Drops	Weight
Mediatek Octocore P22 1.5 Ghz	Android 11 GMS	WVGA 480 x 800 300 Nits	1D/2D imager	HF 13,56MHz (NFC)	4G LTE, Wifi a/b/g/n, Bluetooth 5.0, GPS	IP65 / 1m MIL STD 810G	250g

Low cost, removable battery, built-in keyboard, Android 11



Desktop dock



Pistol Grip



Holster belt clip



Cigar lighter charger



Power adapter USB



SPA43 2 GB RAM, 16 GB FlashROM. Multi-touch touchscreen display. Micro SD. SIM. Charging connector on base. Rear camera 5 Mpx autofocus and flash. USB 2.0 communication and charging client. 140x78x28 mm. Operating from -5°C to +50°C.

Shipped with : 3150 mA battery, hand strap, screen protection, USB power adapter.

Processor	OS	Display	Barcode Reader	RFID Reader	Communication	IP rating / Drops	Weight
Cortex 1,3 GHz Quad Core	Android 11 GMS	WVGA 480 x 800 400 Nits	1D/2D imager	HF 13,56MHz (NFC)	4G LTE, Wifi a/b/g/n, Bluetooth 4.0, GPS	IP66 / 1,2m MIL STD 810G	250g

The less expensive, removable battery and multi-use.



Desktop dock
AT-CASPA4303



Battery 3150 mA
3,7 V
AT-CASPA4301



Arm holster
AT-CASPA4304



Hand strap
AT-CASPA4306



Cigar lighter charger
AT-CASPA4308



Power adapter USB
AT-CASPA4302



Bumper
AT-CASPA4310



E5SL 4 GB RAM, 64 GB EMMC. Rear camera 13 Mpx autofocus and flash. Capacitive multi-touch display. Optional fingerprint scanner. Micro SD. SIM. USB-C and docking connector. POGO PIN. Accelerometer. Brightness sensor. 147.7x74x16.4 mm. Operating from -10°C to +50°C. 4000 mA, 3,85V battery

Shipped with : USB cable, hand strap, USB power adaptor, USB-C to USB type A female adaptor

Processor	OS	Display	Barcode Reader	RFID Reader	Communication	IP rating / Drops	Weight
Qualcomm Snapdragon 625 Octo Core 2Ghz 64 bits	Android 9 GMS	HD 720 x 1280 300 Nits	1D/2D imager	UHF (optional)	4G LTE, Wifi a/b/g/n/ac, Bluetooth 4.1, GPS/ GLONASS	IP65 / 1,2m MIL STD 810G	220g

Various accessories for retail. Long autonomy. Whole range of accessories, compact, powerful, communication base, UHF



USB / Ethernet desktop dock
AT-CAE5SL01



Battery jacket 4000 mA 3,8V
AT-CAE5SL02



Pistol Grip
AT-CAE5SL03



UHF
AT-CAE5SL04



Holster belt clip
CARP10010



4 slots desktop dock



Forearm support
AT-CAE5SL09

Rugged Smartphones and PDA - E Series



E5L 2 GB RAM, 16 GB FlashROM. Rear camera 13 Mpx autofocus and flash and front camera 8 Mpx. Capacitive multi-touch display. Gorilla Glass 4. Micro SD. SIM. Micro USB and docking connector. Accelerometer. Brightness sensor. 156x74x17 mm. Operating from -10°C to +50°C.

Shipped with : 4000 mA battery, wrist strap, USB power adapter.

Processor	OS	Display	Barcode Reader	RFID Reader	Communication	IP rating / Drops	Weight
MT8735A Quad Core ARM® Cortex-A53 MPCore 1.44 GHz	Android 8.1 GMS	HD 720 x 1280 300 Nits	1D/2D imager	HF 13,56MHz (NFC)	4G LTE, Wifi a/b/g/n, Bluetooth 4.0, GPS	IP65 / 1,2m MIL STD 810G	260g

Removable battery, light and thin, physical function keys.



USB / Ethernet desktop dock
AT-CAE5L01



Battery
AT-CAE5L02



Holster belt clip
CARP10010



Wrist strap
AT-CAE5L05



Cigar lighter charger
AT-CASPA4308



Power adapter USB
AT-CAE5L04



Forearm support
AT-CAE5SL09



E6A 4 GB RAM, 64 GB EMMC. Rear camera 13 Mpx autofocus and flash and front camera 5 Mpx. Capacitive multi-touch display. Gorilla Glass 3. Micro SD, micro SIM, USB-C. Accelerometer, brightness sensor. USB-C and docking connector. 185x94x26 mm. Operating from -10°C to 50°C.

Shipped with : 5000 mA/3,7V battery pack, hand strap, USB-C cable, USB power adapter.

Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
Qualcomm MSM8953 Octo Core 2.0Ghz	Android 9/10 GMS	720x1280 300 Nits	1D/2D imager	HF 13,56MHz (NFC)	4G LTE, Wifi a/b/g/n, Bluetooth 4.0, GPS	IP65 / 1,2m MIL STD 810G	360g

Widescreen display, removable battery, very rugged, communication base.



Ethernet desktop dock
AT-CAE603B



2 slots desktop charger
AT-CAE603



Battery 5000mA 3,7V
AT-CAE601



Holster belt clip
AT-CAE606



Hand strap
AT-CAE604



Cigar lighter charger
AT-CASM1016



Power adapter USB
AT-CAE602



Forearm support
AT-CAE5SL09



ADAPTED TO ORDER TAKING

6" and 7" Rugged Tablets - E Series



E6C 4 GB RAM, 64 GB FlashROM, USB 2.0 client, micro SD, micro SIM. Rear camera 8 Mpx autofocus and front camera 2 Mpx. Accelerometer, brightness sensor. Gorilla Glass 3. 720x1280 pixels capacitive and multi-touch display. Micro USB and docking connector. 185x94x26mm. Operating from -10°C to 50°C.

Shipped with : 5000 mA/3,7V battery pack, hand strap, USB power adapter.

Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
Intel Atom Cherrytrail-T Z8350 Quad Core 1,92GHz	Windows 10	720x1280 430 Nits	1D/2D imager	HF 13,56MHz (NFC)	4G, Wifi a/b/g/n, Bluetooth 4.0, GPS	IP65 / 1,2m MIL STD 810G	360g

Windows 10 x64 in 6-inch tablet, removable battery, very rugged.



Athesi E6C Tablet
A real Windows 10 in a 6" tablet



E7B Windows. 4 GB RAM, 64 GB FlashROM. 7500 mA 3,7V battery. USB 2.0 client, micro USB, HDMI, micro SD, SIM. Rear camera 5 Mpx and front camera 2 Mpx. Accelerometer, brightness sensor. Optional fingerprint reader, optional RFID UHF. 217x134x21,4 mm. Operating from -10°C to 50°C.

Shipped with : hand strap, micro USB cable, USB power adapter.



E7T 4Go RAM 64 Go ROM Qualcomm SnapDragon 625 2Ghz OctoCore, display 1280 x 800 capacitive touch screen, 1000 nits, 4GLTE. Wifi 802.11 a/b/g/n,ac Bluetooth Rev 4.0, GPS, Camera 8 Mpx autofocus at the back and 5 Mpx at the front, Accelerometer, light sensor, micro USB 2.0, audio jack, micro HDMI, micro SD, internal battery 7500 mA 3,7V, IP67.

Shipped with : hand strap, power supply, USB cable.

Product	Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
E7B Tablet	Intel Atom Cherrytrail-T Z8350 Quad Core 1,92GHz	Windows 10	1280x800 1000 Nits	1D /2D imager	N/A	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.0 (BLE), GPS	IP67 / 1,2m MIL STD 810G	640g
E7T Tablet	Qualcomm SnapDragon 625 2Ghz OctoCore	Android 9	1280x800 1000 Nits	1D /2D imager	UHF HF 13,56MHz (NFC) Front face	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.0, (BLE) GPS	IP67 / 1,2m MIL STD 810G	640g

Function keys, fingerprint reader, RFID UHF, RFID HF NFC in front side (E7T), high sunlight readability display.



8" Rugged Tablets - E Series



E8B Windows. 4 GB RAM, 128 GB EMMC. Brightness Sensor. Rear camera 5 Mpx autofocus and front camera 2 Mpx. Accelerometer. 2x USB 2.0, audio jack, mini HDMI, micro SD. 8300 mA 3,7V internal battery. 228x145x16.5mm. Operating from -10°C to 50°C.

Shipped with : hand strap, micro USB cable, power supply.



E8T 4Go RAM 64 GoROM Qualcomm SnapDragon 625 2Ghz OctoCore, Display 1280 x 800 dual mode (capacitive touch screen and digitizer), 700 nits, integrated GPS . Wifi 802.11 b/g/n/ac, Bluetooth Rev 4.0, Camera 13 Mpixels autofocus and flash at the back and 5 Mpixels at the front, Accelerometer, Light sensor, USB 3.0, USB OTG, audio jack, 1 micro HDMI, 1 micro SD, Internal Battery 8500 mA 3,7V, IP67.

Shipped with : Hand strap, power supply, USB cable

Product	Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
E8B Tablet	Intel Atom Cherrytrail-T Z8350 Quad Core 1,92GHz	Windows 10	1280 x 800 400 Nits	1D /2D imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.0, GPS	IIP67 / 1,2m MIL STD 810G	710g
E8T Tablet	Qualcomm SnapDragon 625 2Ghz OctoCore	Android 10 GMS	1280 x 800 700 Nits	1D /2D imager	HF 13,56MHz (NFC)	4GLTE, wifi a/b/g/n/ac, Bluetooth 4.0, GPS	IP67 / 1,2m MIL STD 810G	710g

Rugged tablet, various accessories, various setup.



Ethernet desktop dock
AT-CAE8B01



Vehicle Dock
AT-CAE8011B



Harness carrying case
AT-CAE8010



Hand strap
AT-CAE808



Cigar lighter charger
AT-CAE803



Power adapter 5V
AT-CAE805



Active stylus
ask for reference



Stylus attachment
E8/E10/E12
AT-CAE806



DC/DC converter
AT-CAE1005

**RUGGED
TABLET
E8B**

Windows 10

Athesi
Mobile Generation

1.2 M
DROP

RUGGED

1D/2D

4G
LTE

WINDOWS 10

CHERRYTRAIL

RFID HF

10" Rugged Tablets - E Series



E10B Windows. 4 GB RAM, 128 GB EMMC. Brightness sensor. Rear camera 5 Mpx autofocus and front camera 2 Mpx. Accelerometer. 2x USB 2.0, audio jack, mini HDMI, micro SD, SIM. RS232, RJ45. 10000 mA 3,7V internal removable battery. 280x187x22mm. Operating from -10°C to 50°C.

Shipped with : hand strap, micro USB cable, power supply.



E10BK Windows. 8 GB RAM, 128 GB SSD. Brightness sensor. Rear camera 8 Mpx autofocus and front camera 2 Mpx. Accelerometer. USB 3.0, USB 2.0, audio jack, mini HDMI, micro SD, SIM. RS232, RJ45. 280x187x22mm. Operating from -10°C to 50°C.

Shipped with : 5000 mA 7,4V battery pack, hand strap, micro USB cable, power supply.



E10BC Windows. 8 GB RAM, 128 GB SSD. Brightness sensor. Rear camera 8 Mpx autofocus and front camera 2 Mpx. Accelerometer. USB 3.0, USB 2.0, audio jack, mini HDMI, micro SD, SIM. RS232, RJ45. 280x187x22mm. Operating from -10°C to 50°C.

Shipped with : 5000 mA 7,4V battery pack, hand strap, micro USB cable, power supply.



E10T 4 Go RAM 64Go ROM Qualcomm Snapdragon 625 2Ghz OctoCore, Screen 1280 x 800 tactile capacitive and digitizer, 700 nits, GPS. Wifi 802.11 b/g/n/ac, Bluetooth Rev 4.0. Camera 13 Mpx autofocus at the back and 2 Mpx at the front, G sensor, light sensor, 1 USB 3.0, 1 USB-C 2,0, audio jack, micro HDMI, micro SD. RS232, RJ45, swappable battery 10000 mA 3,7V, IP65, 1m drops.

Shipped with : hand strap, Carry handle, Power supply, 1 USB cable

Product	Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drops	Weight
E10B Tablet	Intel Atom Cherrytrail-T Z8350 Quad Core 1,92 GHz	Windows 10	1280 x 800 400 Nits	1D/2D Imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.1, GPS	IP65 / 1,2m MIL STD 810G	1210g
E10BK Tablet	Intel Core Kabylake m3 7Y30 2,6 GHz	Windows 10	1920 x 1200 400 Nits	1D/2D Imager	N/A	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP65 / 1,2m MIL STD 810G	1210g
E10BC Tablet	Core i5 Amberlake i5 8200Y 3,9 GHz	Windows 10	1920 x 1200 400 Nits	1D/2D Imager	N/A	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP65 / 1,2m MIL STD 810G	1210g
E10T Tablet	Qualcomm Snapdragon 625 2Ghz OctoCore	Android 9 GMS	1280 x 800 700 Nits	1D /2D imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.0, GPS	IP65 / 1m MIL STD 810G	1210g

Rugged, ethernet port, RS232 port, communication and charging base. Possibility to have high-performance versions (Kabylake, iCore 5).



E10/E12
Desktop dock
AT-CAE1201
AT-CAE1201K



E10B Vehicle dock with
key lock, Ethernet, DC
jack, 2 USB, RS232
DB9, kit fixation
AT-CAE1011B
AT-CAE1011B1



Additional removable
battery
AT-CAE1008
AT-CAE1008K



Harness carrying case
AT-CAE1013



Hand strap
AT-CAE1006



Cigar lighter charger
AT-CAE803



Power adapter
AT-CAE805



DC/DC converter
AT-CAE1005



Active stylus
ask for reference



Stylus attachment
AT-CAE806



VESA plate
AT-CART8016

12" Rugged Tablets - E Series



E12B Windows. 4 GB RAM, 128 GB EMMC. Brightness sensor. Rear camera 5 Mpx autofocus and front camera 2 Mpx. Accelerometer. 2x USB 2.0, USB 3.0, micro USB, audio jack, mini HDMI, micro SD, SIM. RS232, RJ45. 319x216x23.4mm. Operating from -10°C to 50°C.

Shipped with : 12600 mA 3,7V battery pack, hand strap, micro USB cable, power supply.



E12K Windows. 4 GB RAM, 128 GB SSD. Brightness sensor. Rear camera 8 Mpx autofocus and front camera 2 Mpx. Accelerometer. 2x USB 2.0, USB 3.0, micro USB, audio jack, mini HDMI, micro SD, SIM. RS232, RJ45. 319x216x23.4mm. Operating from -10°C to 50°C.

Shipped with : 5000 mA 7,4V battery pack, hand strap, micro USB cable, power supply.



E12T Android 10 GMS. 4GoRAM, 64Go SSD, Qualcomm Snapdragon 625 2Ghz OctoCore, Screen 1920 x 1200 tactile 10 points capacitive, 300 nits, GPS. Wifi 802.11 b/g/n/ac, Bluetooth Rev 4.2. Camera 13 Mpx autofocus at the back and 5 Mpx at the front, G sensor, 1 USB 3.0, 2 USB 2.0, audio jack, HDMI, micro SD. RS232, RJ45, swappable battery 12600 mA 3,7V, IP65, 1,2m drops.

Shipped with : hand strap, Carry handle, Power supply, 1 USB cable.

Product	Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
E12B Tablet	Intel Atom Cherrytrail-T Z8300 Quad Core 1,8 GHz	Windows 10	1920 x 1200 Dual mode 300 Nits	1D/2D imager	HF 13,56MHz (NFC)	4GLTE, wifi a/b/g/n/ac, Bluetooth 4.1, GPS	IP65 / 1,2m MIL STD 810G	1480 g
E12K Tablet	Intel Core Kabylake m3 7Y30 2,6 GHz	Windows 10	1920 x 1200 Dual mode 300 Nits	1D/2D imager	HF 13,56MHz (NFC)	4GLTE, wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP65 / 1,2m MIL STD 810G	1480 g
E12T Tablet	Qualcomm Snapdragon 625 2Ghz OctoCore	Android 10 GMS	1920 x 1200 10 points capacitive 300 Nits	1D/2D imager	HF 13,56MHz (NFC)	wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP65 / 1,2m MIL STD 810G	1480 g

Widescreen display, various accessories, RS232 and Ethernet port, high performance version (with Kabylake processor).



E10/E12 Ethernet desktop dock
AT-CAE1201
AT-CAE1201K



Additional removable battery
AT-CAE1205
AT-CAE1205K



Cigar lighter charger
AT-CAE803



Hand strap
AT-CAE1206



Harness strap
AT-CAE1207B



Shoulder strap
AT-CAE1207



Power adapter
AT-CAE805
AT-CAE1202



Removable QWERTY keyboard
AT-CAE1210



DC/DC converter
AT-CAE1005



Stylus attachment
AT-CAE806



Active stylus
ask for reference

The industrial range,
Athesi E Series

Athesi
Mobile Generation



5.5" Smartphones and 8" Rugged Tablets - R Series



RT4500 3 Go RAM, 32 Go FlashROM. Rear camera 8 Mpx autofocus Capacitive multi-touch display. Gorilla Glass, micro SD, SIM, USB-C. Accelerometer. Brightness sensor. 235x80x36mm. Operating from -20°C to 50°C.

Shipped with : 6000 mA 3,7V Lithium ION polymer battery pack, hand strap or gun, USB-C cable, power supply, bumper.

Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
Mediatek MT6750T Cortex A53 Octo Core 1,5 GHz	Android 9 GMS	480 x 800 350 Nits	1D/2D imager 2D Long range	HF 13,56MHz (NFC)	4G LTE, Wifi a/b/g/n/ ac, Bluetooth 4.1, AGPS	IP67 / 1,8m MIL STD 810G	460g - 625g

Removable battery, very rugged, built-in hand strap or gun, 2D long range barcode scanner, USB-C slot, variable type of keyboard.



Destock dock
AT-CART450001



4 slots batteries charger
AT-CART450005



6000 mA Battery
AT-CART450003



Hand strap
AT-CART450004



Power adapter
AT-CART450002

Bumper



RT55 4 GB RAM, 64 GB FlashROM, 5100 mA Lithium ION polymer battery. Rear camera 13 Mpx autofocus and flash and front camera 8 Mpx. Capacitive multi-touch display. Gorilla Glass, micro SD, 1 slot SIM, USB-C client. Accelerometer. Brightness sensor. 175x83x20.5mm. Operating from -20°C to 50°C.

Shipped with : 5100 mA 3,7V battery, hand strap, USB-C cable, power supply, bumper.

Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
MT6750T Cortex A53 Octo Core 1,5 GHz	Android 9 GMS	Full HD 1080 x 1920 400 Nits	1D/2D imager	HF 13,56MHz (NFC)	4G LTE, Wifi a/b/g/n/ac, Bluetooth 4.1, AGPS	IP67 / 1,5m MIL STD 810G	335g

Removable battery, very rugged, integrated hand strap, Full HD display, USB-C.



Destock dock
AT-CART5501



4 slots batteries charger
AT-CART5505



5100mA Battery
AT-CART5502



Hand strap
AT-CART5503



Power adapter
AT-CART5507



Bumper
AT-CART5506



RT80 Windows. 4 GB RAM, 128 GB SSD MLC. Rear camera 8 Mpx autofocus and front camera 2 Mpx. G-sensor. Brightness sensor. NFC. USB 2.0, USB 3.0, audio jack, micro HDMI, micro SD, SIM. 160 mA 3,7V internal battery. 232.6x150x22mm. Operating from -10°C to 50°C.

Shipped with : 11850 mA 3,8V hot-swappable battery pack, hand strap, carrying handle, stylus and stylus attachment, screen protection, power supply.



RT80A Android. 4 GB RAM, 64 GB SSD MLC. Rear camera 8 Mpx autofocus and front camera 2 Mpx. G-sensor. Brightness sensor. NFC. USB 2.0, USB 3.0, audio jack, micro HDMI, micro SD, SIM. 160 mA 3,7V internal battery. 232.6x150x22mm. Operating from -10°C to 50°C.

Shipped with : 11850 mA 3,8V hot-swappable battery pack, hand strap, carrying handle, stylus and stylus attachment, screen protection, power supply.

Product	Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
RT80 Tablet	Intel Atom Cherrytrail-T Z8550 2,4GHz Quad Core	Windows 10	1280 x 800 370 Nits	1D/2D Imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.1, GPS	IP65 / 1,5m MIL STD 810G	910g
RT80A Tablet	Rockchip RK3399 2GHz Hexa Core	Android 9 GMS	1280 x 800 470 Nits	1D/2D imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP65 / 1,5m MIL STD 810G	910g

Android or Windows platform, hot-swappable battery, industrial accessories, extended connectivity, very rugged.

10" and 12" Rugged Tablets - R Series



RT101 Windows. 4 GB RAM, 128 GB SSD MLC. Rear camera 8 Mpx autofocus and front camera 2 Mpx. G-sensor. Brightness sensor. NFC. USB 2.0, USB 3.0, audio jack, micro HDMI, micro SD, SIM. 160 mA 3,7V internal battery. 283.4x192x29.1mm. Operating from -10°C to 50°C.

Shipped with : 10800 mA 3,8V hot-swappable battery pack, hand strap, carrying handle, stylus and stylus attachment, screen protection, power supply.



RT101A Android. 4 GB RAM, 64 GB SSD MLC. Rear camera 8 Mpx autofocus and front camera 2 Mpx. G-sensor. Brightness sensor. NFC. USB 2.0, USB 3.0, audio jack, micro HDMI, micro SD, SIM. 160 mA 3,7V internal battery. 283.4x192x29.1mm. Operating from -10°C to 50°C.

Shipped with : 10800 mA 3,8V hot-swappable battery pack, hand strap, carrying handle, stylus and stylus attachment, screen protection, power supply.

Product	Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
RT101 Tablet	Intel Atom Cherrytrail-T Z8550 2,4GHz Quad Core	Windows 10	1920 x 1200 470 Nits	1D/2D Imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.0, GPS	IP65 / 1,5m MIL STD 810G	1275g
RT101A Tablet	Rockchip RK3399 2GHz Hexa Core	Android 9 GMS	1920 x 1200 470 Nits	1D/2D imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP65 / 1,5m MIL STD 810G	1275g

Android or Windows platform, hot-swappable battery, industrial accessories, extended connectivity, very rugged.



Desktop dock
AT-CART12201
AT-CART8001B



Vehicle dock
AT-CART12202
AT-CART101B01
AT-CART8002B



Battery
AT-CART12204
AT-CART10102
AT-CART8004



4 slots batteries charger
AT-CART12210
AT-CART8010



Harness carrying case
AT-CART12205
AT-CART10105
AT-CART8017



Carrying handle
AT-CART12206
AT-CART8007



Hand strap
AT-CART12205
AT-CART10103
AT-CART8006



Shoulder strap
AT-CAE1207



Cigar lighter charger
AT-CART8012



Capacitive stylus
AT-CART8009



Active stylus RT122
AT-CART12207



SNAP-ON
AT-CART8005



VESA plate
AT-CART8016



RT120 Intel Core i7 8550U, 8GBRAM/128GbSSD, GPS, 4GLTE, NFC 12,2" Screen full HD 1920 x 1200 tactile capacitive, 280 nits, Wifi 802.11 a/b/g/n/ac, Bluetooth Rev 4.2. Camera 8 Mpx autofocus at the back and 2 Mpx at the front, G sensor, light sensor, USB 3.0 & USB type C, audio jack, mini HDMI, micro SD, hot swappable battery 6300 mA 7,4V, internal battery 860mA 7,4V, IP65, 1.2m drops

Shipped with : battery 6300 mA 7,4V, hand strap, carry handle, Power supply, screen protector

Product	Processor	OS	Display	Barcode reader	RFID reader	Communication	IP rating / Drop	Weight
RT120 Tablet	Intel Core i7 8550U	Windows 10	1920 x 1200 capacitive 280 Nits	1D/2D imager	HF 13,56MHz (NFC)	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP65 / 1,2m MIL STD 810G	1955g

Hot-swappable battery, industrial accessories, extended connectivity, very rugged, high performance version with iCore 5 processor.



Hand strap
AT-CART12006



Shoulder strap
AT-CAE1207



Cigar lighter charger
AT-CART12212



Harness strap
AT-CAE1207B



Power adapter
AT-CAE12002



Vehicle dock
AT-CART12005



Desktop dock
AT-CART12001

4.3"

EID10 Hexa Core CPU Rockchip 1,8 GHz, 4 GB RAM and 32 GB Flash. Rear camera 13 Mpx flash and autofocus. 147x78x21mm. Operating from -20°C to +60°C.

Shipped with : 2860 mA battery pack, 1 desktop cradle with power supply and an USB cable , 2 stylus with a stylus attachment and a screen protection.



RP70A BIO Android. 4 GB RAM, 32 GB SSD. Rear camera 13 Mpx autofocus and flash and front camera 2 Mpx. G-sensor. Brightness sensor. USB 3.0, audio jack, micro SD, micro SIM. 200mA internal battery. 213mm(H)x195.3mm(W)x30.55mm/20.95mm(D). Operating from -20°C to 60°C.

Shipped with : 5600mA 3,7V hot-swappable battery pack, hand strap, USB cable, power supply.

Product / Reference	OS	Display	Keys	Scanners	Communication	IP rating / Drop	Weight
RP1600X EID 10	Android 8.1 GMS	4,3" WVGA 500 Nits	5 front and 5 side keys	1D/2D reader, 13.56 MHz NFC RFID reader, fingerprint, OCR, MRZ, smart card reader, MSR, facial recognition	4G LTE, Wifi a/b/g/n/ac, Bluetooth 4.2 LE, A-GPS	IP64 / 1,5m	495g
RP70A BIO Tablet	Rockchip CPU Hexa Core 1,8 GHz	Android 8.1 GMS	1280 x 800 Dual mode 700 Nits	1D/2D reader, NFC reader, fingerprint, OCR, MRZ, MSR, smart card reader, facial and iris recognition	4GLTE, Wifi a/b/g/n/ac, Bluetooth 4.2, GPS	IP64 / 1,2m MIL STD 810G	850g

Very compact, all-in-one product with OCR/MRZ reader, MSR reader, fingerprint reader, smart card reader, facial recognition, NFC, 1D/2D reader.



FRDT10 Linux, Dual Processor 1Go RAM, 16Go Flash, Display 8" ' 1080x 1920, 400 nits, Temp Sensor, Image Sensor, TF card Storage, 1 RJ45 10/100, 1 WIEGAND input / output, IP65

Shipped with : 1 strobe siren, 1 relay, power adaptor

Product / Reference	OS	Display	Interface	IP rating / Drop
FRDT10	Linux	8" 1080x1920 400 nits	Temp Sensor, Image Sensor, Wiegand input / output,, RJ45 10/100	IP65

Access control, sanitary control, people identification.

Barcode reader and RFID



S2xxx Barcode reader in handheld format, 54x190x60 mm, resist to drop of 1,5 m on concrete floor. Operating from 0 to 40°C, 150g.

Shipped with : USB cable, user guide.

Product	Reference	Reading technology	Barcode	Reading distance	Connectivity	Interface
Scanner	AT-S2310	Linear Imager	1D	up to 28 cm	Wired and Radio	USB HID
Scanner	AT-S2510	Imager	1D/2D	up to 28 cm	Wired and Radio	USB HID

Simple to use, format, user-friendly, ergonomic, attractive price.



S3000 1D/2D barcode scanner, 170x85x70 mm, resist to drop of 2 m on concrete floor, IP54. Operating from -10°C to 50°C. 146g and 240g with USB cable.

Shipped with : USB cable, user guide.

Product	Reference	Reading technology	Barcode	Reading distance	Connectivity	Interface
Gun	AT-S3000	1D/2D Imager	1D/2D	up to 43 cm	Wired	USB HID

Simple to use, format, user-friendly, ergonomic, attractive price.



S4500 Omnidirectional counter reader with automatic detection. 90x70x140 mm. 395g. High reading speed: 2000 scans/sec

Shipped with : USB cable, quick start guide.

Product	Reference	Reading technology	Barcode	Reading distance	Connectivity	Interface
Fixed scanner	AT-S4500	Omni-directional laser	1D	up to 30 cm	Wired	USB HID

Compact and performant. Easy and fast USB connection.



RS102D Ring scanner barcode reader.

Shipped with : USB cable, Bluetooth USB adapter, setup CD, user guide.

Product	Ref	Reading technology	Barcode	Reading distance	Connectivity	Interface	Shipped with	IP rating / Drop	Weight
Ring Scanner	AT-RS10200	Imager	1D/2D	up to 24 cm	Bluetooth	HID SPP	USB cable, Quick start guide	IP54 / 1,5m	50g

Light, left-handed and right-handed compatible, simple to use.



SR800 UHF sensor. Barcode. Bluetooth. BLUE OLED display of 1,3-inch. Resists to drop up to 1,8 m on concrete. IP68. Internal battery of 3300 mA.

Shipped with : wrist strap, Power adapter, USB cable

Product	Reference	Technology	OS	Weight
RFID reader UHF	SR800	Bluetooth 4.1 BLE, UHF CE/FCC	Android, IOS and Windows	220 g

RFID UHF and 2D barcode reader, display and Bluetooth.



SR900 for Android and Windows
SR900i for iOS

UHF/Bluetooth captor

Shipped with : Power adapter, USB cable.

Product	Reference	Technology	OS	Weight
RFID reader UHF	SR900	Bluetooth V2.1, USB 1.1, UHF CE/FCC	Android, IOS and Windows	170 g

Good bargain, good deal, connects via USB or Bluetooth.

Software tools

Depending on the product and operating system you selected, you can have access to software tools that make it easier to use, deploy, and remotely monitor the device.

Kiosk mode

This software is mainly designed to lock the system. Users limited access to device features within the scope of their software application.



Auto Setup

This feature allows applications to be installed and configured automatically and to be repeated on several terminals in an efficient way.

Auto Test

This integrated software tool is quite interesting for the first level of diagnostic. It allows testing one by one the hardware functionalities and to check if each function is working properly (Wi-Fi, barcodes, RFID, Display, Sensor...)



Barcode reader emulator

This software tool retrieves, in the active input area, the read and decoded barcode. It runs as background service after launch.



RFID reader emulator

This software tool retrieves, in the active input area, the read RFID tag code. It runs as background service after launch.

Software development toolkit (SDK)


Athesi provides a software development kit which gives to developers the possibility to manage directly some features like barcode scanner, RFID reader, smart card or magnetic card reader, 3D camera for the optimization and the customization of the software.



Mobile Device Management (MDM)

Athesi regularly get its devices approved by various editors according to the customer demand and their requirements. MDMs are powerful and complete tools for remote administration and device monitoring.

Athesi clients use different MDMs on the market such as Springdel, SOTI, Telelogos, TinyMDM, Microsoft, ...

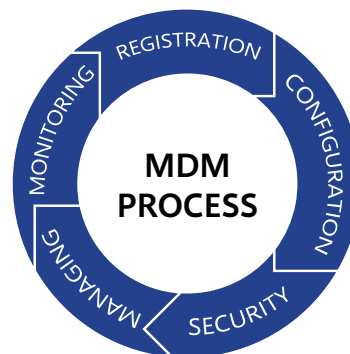

Terminal Emulation software

To better and easily use Athesi devices in specific environment, it is possible to use a terminal like an emulator TNVT for example. For information, Athesi hardware is approved to work with IVANTI's Velocity emulators.



At a glance

X	Default	E Series	Athesi Security
O	Optional	R Series	
-	Not available		

	Display	NITS	Android	Windows	Removable battery	1D/2D scanner	RFID NFC	4G LTE	GSM Voice	fingerprint reader	Smart card reader	Drop (m)	IP	Weight (g)	Desktop dock	Vehicle dock
E40	4.0	300	11 GMS	-	X	O	HF (NFC)	X	X	-	-	1	65	250	X	-
SPA43	4.3	400	11 GMS	-	X	O	HF (NFC)	X	-	-	-	1.2	66	250	X	-
RP1600X EID10	4.3	500	8.1 GMS	-	X	O	HF (NFC)	X	X	O	O	1.5	64	495	X	X
RT4500	4.5	375	9 GMS	-	X	X	-	X	-	-	-	1.8	67	460 625	X	-
E5SL	5	300	9 GMS	-	-	X	O	X	X	O	-	1.2	65	220	X	-
E5L	5	300	8.1 GMS	-	X	O	HF (NFC)	X	X	-	-	1.2	65	260	X	-
RT55	5.5	400	9 GMS	-	X	O	HF (NFC)	X	X	-	-	1.5	67	335	X	-
E6A	6	300	9/10 GMS	-	X	O	HF (NFC)	X	X	-	-	1.2	65	360	X	-
E6C	6	430	-	10	X	O	HF (NFC)	X	-	-	-	1.2	65	360	X	-
RP70ABIO	7	700	8.1 GMS	-	X hot swap	O	HF (NFC)	O	-	O	O	1.2	64	850	X	X
E7B	7	1000	-	-	-	O	O - UHF	X	-	O	-	1.2	67	640	X	-
E7T	7	1000	9	-	-	O	X- HF(NFC) O - UHF	X	X	O	-	1.2	67	640	X	-
E8B	8	400	-	10	-	O	HF (NFC)	X	-	-	-	1.2	67	710	X	X
E8T	8	700	10 GMS	-	-	O	HF (NFC)	X	X	-	-	1.2	67	710	X	X
RT80	8	370	-	10	X hot swap	O	HF (NFC)	O	-	O	-	1.5	65	910	X	X
RT80A	8	470	9 GMS	-	X hot swap	O	HF (NFC)	O	-	O	-	1.5	65	910	X	X
E10B	10.1	400	-	10	-	O	HF (NFC)	X	-	-	-	1.2	65	1210	X	X
E10T	10.1	700	9 GMS	-	X	O	HF (NFC)	X	X	-	-	1.2	65	1210	X	X
E10BK	10.1	400	-	10	X	O	HF (NFC)	X	-	-	-	1.2	65	1210	X	X
E10BC	10.1	400	-	10	X	O	HF (NFC)	X	-	-	-	1.2	65	1210	X	X
RT101	10.1	470	-	10	X hot swap	O	HF (NFC)	O	-	O	-	1.5	65	1275	X	X
RT101A	10.1	470	9 GMS	-	X hot swap	O	HF (NFC)	O	-	O	-	1.5	65	1275	X	X
E12B	12.2	300	-	10	X	O	HF (NFC)	X	-	-	-	1.2	65	1480	X	X
E12K	12.2	300	-	10	X	O	HF (NFC)	X	-	-	-	1.2	65	1480	X	X
E12T	12.2	300	10 GMS	-	X	O	HF (NFC)	X	-	-	-	1.2	65	1480	X	X
RT120	12.2	280	-	10	X hot swap	O	HF (NFC)	X	-	O	-	1.2	65	1955	X	X

Athesi is also Athesi Professional brand dedicated to the rugged mobile World

AP5702



AP5706



AP5705S



AP6301



OS	Android 11 GMS	Android 11 GMS	Android 10 AER - GMS	Android 9 GMS
Dimensions / Weight	157.5 x 78.1 x 13.7 mm 265g	159 x 79.4 x 18 mm 325g	159.4 x 77.7 x 13.7 mm 275g	168.5 x 81 x 14.8 mm 322g
Display	5.7" HD+ IPS 720x1440px 5 points multi-touch 18:9	5.7" HD+ IPS 720x1440px 5 points multi-touch 18:9	5.7" HD+ IPS 740x1440px 5 points multi-touch 18:9	6.3" FHD+ IPS 1080x2340 px 5 points multi-touch 19.5:9
Brightness	400 Nits	400 Nits	540 Nits	531 Nits
Connectivity	802.11 a/b/g/n/ac 4GLTE	802.11 a/b/g/n/ac 4GLTE	802.11 a/b/g/n/ac 4GLTE	802.11 a/b/g/n/ac 4GLTE
CPU	Mediatek Helio A20 MT6761D 4xCortexA53 Quadcore	Mediatek Helio A25 MT6762 Octocore 4xCortexA53 1.8 GHz + 4xCortexA53 1.5 GHz	Mediatek Helio P22 Octocore 1.8GHz	Mediatek Helio P70 Octocore 2.1 ~ 2 GHz
Memory	3GB RAM LPDDR3 32GB EMMC (TF 128GB)	4GB RAM LPDDR4X 64GB EMMC (TF 128GB)*	4GB RAM LPDDR4X 128GB EMMC (TF 128GB)	6GB RAM LPDDR4X 128GB EMMC (TF 256GB)
Camera	Front 5MP Rear 8.0MP + 5.0MP	Front 8MP Rear 16.0MP+0.3MP+0.3MP	Front 13MP Rear 16MP + 8MP + 0.3MP	Front 16MP Rear : Thermal Imagery + 48MP + 5MP
Barcode Reader	Through camera	Through camera	1D/2D dedicated reader N6603SR	Through camera
IR remote control	No	No	Yes	Yes
Fingerprint Face scanning	Facial	Embedded	Embedded	Embedded
NFC	Embedded	Embedded	Embedded	Embedded
Bluetooth	5.0	5.0	5.0	4.1
Battery	5580 mAh 5V Lithium-Polymer	8580 mAh 5V Lithium-Polymer	5580 mAh 5V Lithium-Polymer	6580 mAh 5V Lithium-Polymer
USB Charging	Yes	Yes	Yes	Yes
Wireless Charging	No	No	Yes	Yes
Earphones Jack	jack 3,5mm	USB C	USB C	jack 3,5mm
Navigation	GPS + GLONASS + BEIDOU + GALILEO	GPS + GLONASS + BEIDOU + GALILEO	GPS + GLONASS + BEIDOU + GALILEO	GPS + GLONASS + BEIDOU
Rugged Features	IP68 & IP69K 1.5 m Drop MIL-STD-810G	IP68 & IP69K 1,2m Drop MIL-STD-810G	IP68 1.5 m Drop MIL-STD-810G	IP68 & IP69K 1.5 m Drop MIL-STD-810G
Temperature	From -30° to +60°	-30° to +60°	From -30° to +60°	From -30° to +60°
IO	2 Nano-SIM (or 1 Nano-SIM, 1 TF) Micro sd 128GB Micro USB	2 Nano-SIM (or 1 Nano-SIM, 1 TF) Micro sd 128GB USB C	2 Nano-SIM (or 1 Nano-SIM, 1 TF) Micro sd 128GB USB C	2 Nano-SIM (or 1 Nano-SIM, 1 TF) Micro sd 256GB Micro USB C
Softwares	Sound Meter + Compass + Flashlight + Inclinator + Pic Hanging + Height Measure + Magnifier + Dictaphone + Pedometer + Plumb Bob + Protractor	Sound Meter + Compass + Flashlight + Inclinator + Pic Hanging + Height Measure + Magnifier + Dictaphone + Pedometer + Plumb Bob + Protractor	Sound Meter + Compass + Flashlight + Inclinator + Pic Hanging + Height Measure + Magnifier + Alarm + Pedometer + Plumb Bob + Protractor + Barcode datacapture and storage	Sound Meter + Compass + Flashlight + Inclinator + Pic Hanging + Height Measure + Magnifier + Alarm + Pedometer + Plumb Bob + Protractor + Barometer
Kiosk Mode	Embedded	Embedded	Embedded	Embedded
SOS Features	No	Embedded	Embedded	Embedded
SAR				
Head	0.369 W/kg	0.737 W/Kg	0.260 W/kg	0.309 W/kg
Body	0.369 W/kg	1.322 W/Kg	0.589 W/kg	0.991 W/kg
Members	2.334 W/kg	3.396 W/Kg	1.265 W/kg	
Warranty	2 Years	2 Years	2 Years	2 Years

AP8001TL**8" DISPLAY****AP8001CL****8" DISPLAY****AP1001CL****10" DISPLAY****AP1001TL****10" DISPLAY**

OS	Android 10	Windows 10	Windows 10	Android 10
Dimensions / Weight	220x143x14 mm 650g	220x143x14 mm 650g	266 x 174.4 x 15.7 mm 920g	266 x 174.4x 15.7 mm 920g
Display	8 800x1280 IPS 5 points multi-touch	8 800x1280 IPS 16:10 10 points multi-touch	10.1 HD+ IPS 1200x1920px 10 points multi-touch 16:10	10.1 1200x1920 IPS 10 points multi-touch
Brightness	450 Nits	450 Nits	450 Nits	400 Nits
Connectivity	Wi-Fi 802.11 a/b/g/n/ac HSPDA-HSUPA 3.8G/4G LTE	Wi-Fi 802.11 a/b/g/n/ac HSPDA-HSUPA 3.8G/4G LTE	Wi-Fi 802.11 a/b/g/n/ac 4GLTE	Wi-Fi 802.11 a/b/g/n/ac 4GLTE
CPU	Qualcomm snapdragon 625 8 core MSM8953 2GHz	Intel® Cherrytrail Quad-core, Z8350, 1.92 Ghz	Intel® Cherrytrail Quad-core, Z8350 1.92 Ghz	Qualcomm Snapdragon 625 8 core MSM8953 2GHz
Memory	4 GB LPDDR3 64 GB EMMC ROM	4 GB LPDDR3 L 64 GB EMMC ROM	4GB DDR3 64GB EMMC ROM	4 GB LPDDR3 64 GB EMMC ROM
Camera	Front 5MP Rear 13MP with auto focus	Avant 2MP Rear 5MP with auto focus	Avant 2MP Rear 5MP with auto focus	Front 5MP Rear 13MP with auto focus
Barcode reader	Through camera / bluetooth or USB dedicated reader	Through camera / bluetooth or USB dedicated reader	Through camera / bluetooth or USB dedicated reader	Through camera / bluetooth or USB dedicated reader
NFC	Embedded	Embedded	Embedded	Embedded
Bluetooth	4.0 BLE	4.2 BLE	4.2 BLE	4.0 BLE
Battery	7500 mAh 3.7V Lithium-Ion-Polymère	7500 mAh 3.7V Lithium-Ion-Polymère	10 000 mA - 3.7V Lithium-Ion Polymère	10 000 mA - 3.7V Lithium-Ion Polymère
USB-C Charging	No	No	No	No
Earphones jack	Jack 3,5mm	jack 3,5mm	Jack 3,5mm	Jack 3,5mm
Navigation	GNSS GPS/GLONASS	GNSS GPS/GLONASS	GNSS GPS + GLONASS Ublox NEO7	GNSS GPS/GLONASS/QZSS
Rugged Features	IP67 MIL-STD-810G Shock and vibration 1,2 m Drop	IP67 MIL-STD-810G Shock and vibration 1,2 m Drop	IP65 MIL-STD-810G Shock and vibration 1,2 m Drop	IP65 MIL-STD-810G Shock and vibration 1,2 m Drop
Temperature	-20°C à +55°C	-20°C à +60°C	-20°C à +60°C	-20°C à +55°C
IO	TF SD x1 Max 128 GB Micro USB 3.0 OTG HDMI 1.4a Type C SIM x1 Audio jack	TF SD x1 Max 128 GB Micro USB 2.0 OTG HDMI 1.4a Type C SIM x1 Audio jack	TF SD x1 Max 128 GB Micro USB 2.0 x1 HDMI 1.4a Type C SIM x1 Audio jack	TF SD x1 Max 128 GB Micro USB 3.0 x1 HDMI 1.4a Type C SIM x1 Audio jack
Softwares	Accelerometer + Compass + Inclinometer	Accelerometer + Compass + Inclinometer	Accelerometer + Compass + Inclinometer	Accelerometer + Compass + Inclinometer
Guarantee	2 Years	2 Years	2 Years	2 Years

About Athesi Professional

www.athesi-professional.com

Athesi professional is a brand of Athesi, an expert for more than 30 years in the design of rugged mobile equipment for professionals. The French company uses its experience in the company to create rugged and waterproof phones and tablets designed to be used by the greatest number and in all circumstances.



TO CONTACT US

Athesi - 31 rue des clotais
94360 Bry sur marne - France
+33(0)1 83 64 57 40
Mail : info@athesi.fr

Athesi

Mobile Generation

A french brand

31 rue des Clotais
94360 Bry-sur-Marne
France

+33 1 83 64 57 40

info@athesi.com
www.athesi.com
 Athesi



Distributed by :